

# Fist Grip® Wire Rope Clips


**SEE APPLICATION AND WARNING INFORMATION**  
 Para Español: [www.thecrosbygroup.com](http://www.thecrosbygroup.com) On Page 51

## NEW STYLE FIST GRIP CLIPS 5 MM - 16 MM




Fist Grip wire clips meet or exceed the performance requirements of Federal Specification FF-C-450 Type III, Class 1, except for those provisions required of the contractor. For additional information, see page 391.

- Entire clip is Galvanized to resist corrosive and rusting action.
- Based on the catalog breaking strength of wire rope, Crosby wire rope clips have an efficiency rating of 80% for 5mm - 22mm, and 90% for sizes 24mm through 40mm.
- Bolts are an integral part of the saddle. Nuts can be installed in such a way as to enable the operator to swing the wrench in a full arc for fast installation.
- All sizes have forged steel saddles.
- All Clips are individually bagged or tagged with proper application instructions and warning information.
- Crosby products meet or exceed all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, Crosby products meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.
- Assembled with standard heavy hex nuts.

## FIST GRIP® CLIPS 19 MM - 38 MM



### 3/16" - 5/8"

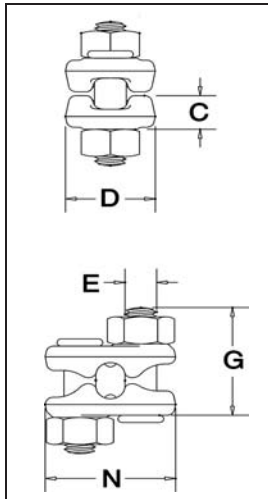

## G-429 Fist Grip® Clips

Rope Size		G-429 Stock No.	Std. Package Qty.	Weight Per 100 (kg)	Dimensions (mm)				
(mm)*	(in.)				C	D	E	G	N
5-7	3/16 - 1/4	1010471	100	10.4	10.2	23.9	9.65	32.5	36.6
8	5/16	1010499	100	12.7	11.9	26.9	9.65	37.3	39.1
10	3/8	1010514	50	18.1	13.0	26.9	11.2	46.0	45.2
11-13	7/16 - 1/2	1010532	50	28.1	15.0	31.8	12.7	55.5	54.6
14-16	9/16 - 5/8	1010550	50	46.7	18.3	38.1	16.0	68.5	65.3
18-20	3/4	1010578	25	79	21.8	46.0	19.1	74.5	67.8
22	7/8	1010596	25	102	24.6	53.8	19.1	84.0	72.6
24-26	1	1010612	10	136	28.7	57.0	19.1	94.5	77.7
28-30	1-1/8	1010630	10	181	32.5	60.5	22.4	107	87.4
32-34	1-1/4	1010658	10	181	34.0	63.5	22.4	108	90.4
36-40	1-3/8 - 1-1/2	1010676	Bulk	318	39.6	76.0	25.4	141	105

\* Sizes through 16mm incorporate New Style design.

### 3/4" - 1-1/2"

